



Attributes

- Fail-safe
- Axial to radial stiffness ratio 1:1
- Compact, low profile design
- Easy to install
- Rugged design

Applications

- Truck, bus and marine
- Generators, HVAC
- Electronics
- Pumps, compressors, blowers

Load range

- 1761 = 5 load ratings to 300 lbs. max.
- 1762 = 5 load ratings to 630 lbs. max.
- 1763 = 5 load ratings to 1330 lbs. max.
- 1764 = 5 load ratings to 2100 lbs. max.
- 1765 = 5 load ratings to 4560 lbs. max.

Weights

- 1761 = .10 lbs.
- 1762 = .31 lbs.
- 1763 = .70 lbs.
- 1764 = 1.5 lbs.
- 1765 = 2.8 lbs.

Specifications

- Natural Frequency—8-18 Hertz
- Transmissibility at resonance—10:1
- Resilient Element—Neoprene
- Standard materials—Cold-rolled steel


Elastomeric Data

- Neoprene has an operating temperature range of -40°F to +200°F (-40°C to +93°C) and is resistant to oil, most solvents and ozone
- Other elastomeric formulations are available in BUNA-N, Silicone, Butyl and Polybutadiene for improved damping, low and high temperature resistance

Specifications subject to change without notice. Check with factory for latest revisions. The Federal Trade Commission considers no existing test methods or standards regarding flammability as accurate indicators of the performance of cellular plastic materials under actual fire conditions. Results of existing test methods, such as UL-94, MVSS-302, SAE J-369, and FAR 25.853 are intended only as measurements of the performance of such materials under specific controlled test conditions. Any flammability ratings shown are not intended to reflect hazards presented by these materials under actual fire conditions. The information contained herein is based on laboratory test data developed for PTI and is believed to be reliable, but its accuracy or completeness is not guaranteed. The buyer must test any product to determine the suitability for his specific application before use. PTI DISCLAIMS ANY RESPONSIBILITY FOR: 1) WARRANTIES OF FITNESS AND PURPOSE, 2) VERBAL RECOMMENDATIONS, 3) CONSEQUENTIAL DAMAGES FROM USE AND 4) VIOLATION OF ANY PATENTS OF TRADEMARKS HELD BY OTHERS.





Part #	Thick Plate Thickness (in.)	Axial Load Thick (lbs.)	Radial Load Thick (lbs.)	Axial Natural Frequency (hz.) Thick	Thin Plate Thickness (in.)	Axial Load Thin (lbs.)	Radial Load Thin (lbs.)	Axial Natural Frequency (hz.) Thin	Bolt Size Grade 8	Max Torque (ft.-lbs) Dry	Color
1762-30	18/32	130	50	12	1/2	60	40	15	1/2	120	Red
1762-40	18/32	175	65	12	1/2	120	80	15	1/2	120	Orange
1762-50	18/32	240	90	12	1/2	160	125	15	1/2	120	Yellow
1762-60	18/32	380	165	12	1/2	210	180	15	1/2	120	Green
1762-70	18/32	630	280	12	1/2	380	280	15	1/2	120	Blue

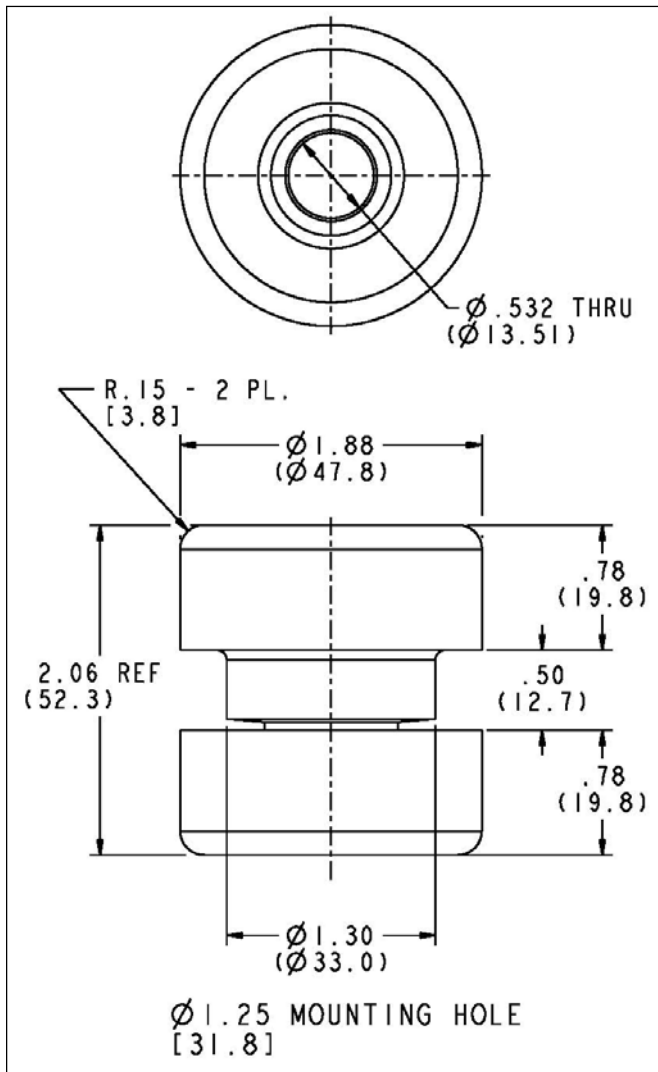

SNUBBING WASHER
P/N SW-2130-0532-0134-SZ
O.D. = $\phi 2.130$ "
I.D. = $\phi .532$ "
THICKNESS = .134"
MATERIAL—1010-1020 CRS
FINISH—CLEAR ZINC


Specifications subject to change without notice. Check with factory for latest revisions. The Federal Trade Commission considers no existing test methods or standards regarding flammability as accurate indicators of the performance of cellular plastic materials under actual fire conditions. Results of existing test methods, such as UL-94, MVSS-302, SAE J-369, and FAR 25.853 are intended only as measurements of the performance of such materials under specific controlled test conditions. Any flammability ratings shown are not intended to reflect hazards presented by these materials under actual fire conditions. The information contained herein is based on laboratory test data developed for PTI and is believed to be reliable, but its accuracy or completeness is not guaranteed. The buyer must test any product to determine the suitability for his specific application before use. PTI DISCLAIMS ANY RESPONSIBILITY FOR: 1) WARRANTIES OF FITNESS AND PURPOSE, 2) VERBAL RECOMMENDATIONS, 3) CONSEQUENTIAL DAMAGES FROM USE AND 4) VIOLATION OF ANY PATENTS OF TRADEMARKS HELD BY OTHERS.

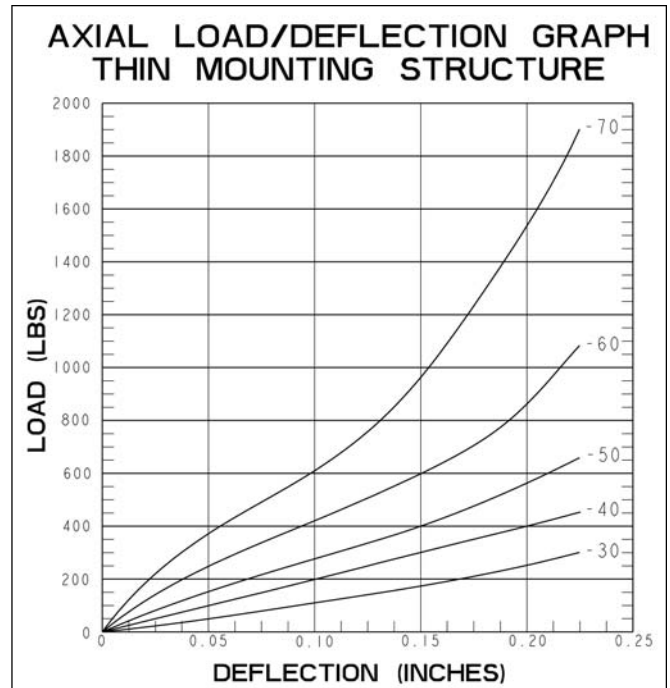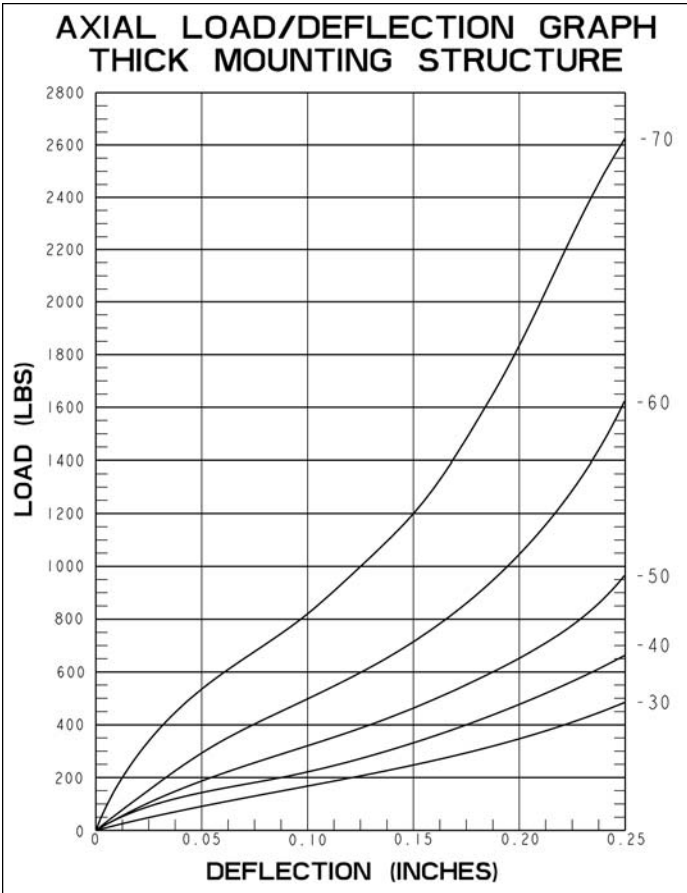

Specifications subject to change without notice. Check with factory for latest revisions. The Federal Trade Commission considers no existing test methods or standards regarding flammability as accurate indicators of the performance of cellular plastic materials under actual fire conditions. Results of existing test methods, such as UL-94, MVSS-302, SAE J-369, and FAR 25.853 are intended only as measurements of the performance of such materials under specific controlled test conditions. Any flammability ratings shown are not intended to reflect hazards presented by these materials under actual fire conditions. The information contained herein is based on laboratory test data developed for PTI and is believed to be reliable, but its accuracy or completeness is not guaranteed. The buyer must test any product to determine the suitability for his specific application before use. PTI DISCLAIMS ANY RESPONSIBILITY FOR: 1) WARRANTIES OF FITNESS AND PURPOSE, 2) VERBAL RECOMMENDATIONS, 3) CONSEQUENTIAL DAMAGES FROM USE AND 4) VIOLATION OF ANY PATENTS OR TRADEMARKS HELD BY OTHERS.



Part #	Mounting Hole Diameter	Mounting Hole Radius	Snubbing Washer Part Number	Snubbing Washer OD	Snubbing Washer ID	Snubbing Washer Thickness
1761	.75	.04	SW 1560-0391-0090-SZ	1.560	.391	.090
1762	1.25	.06	SW-2130-0532-0134-SZ	2.130	.532	.134
1763	1.50	.09	SW-2810-0657-0188-SZ	2.810	.657	.188
1764	2.25	.12	SW-3880-0938-0250-SZ	3.880	.938	.250
1765	2.50	.13	SW-5250-1063-0375-SZ	5.250	1.063	.375

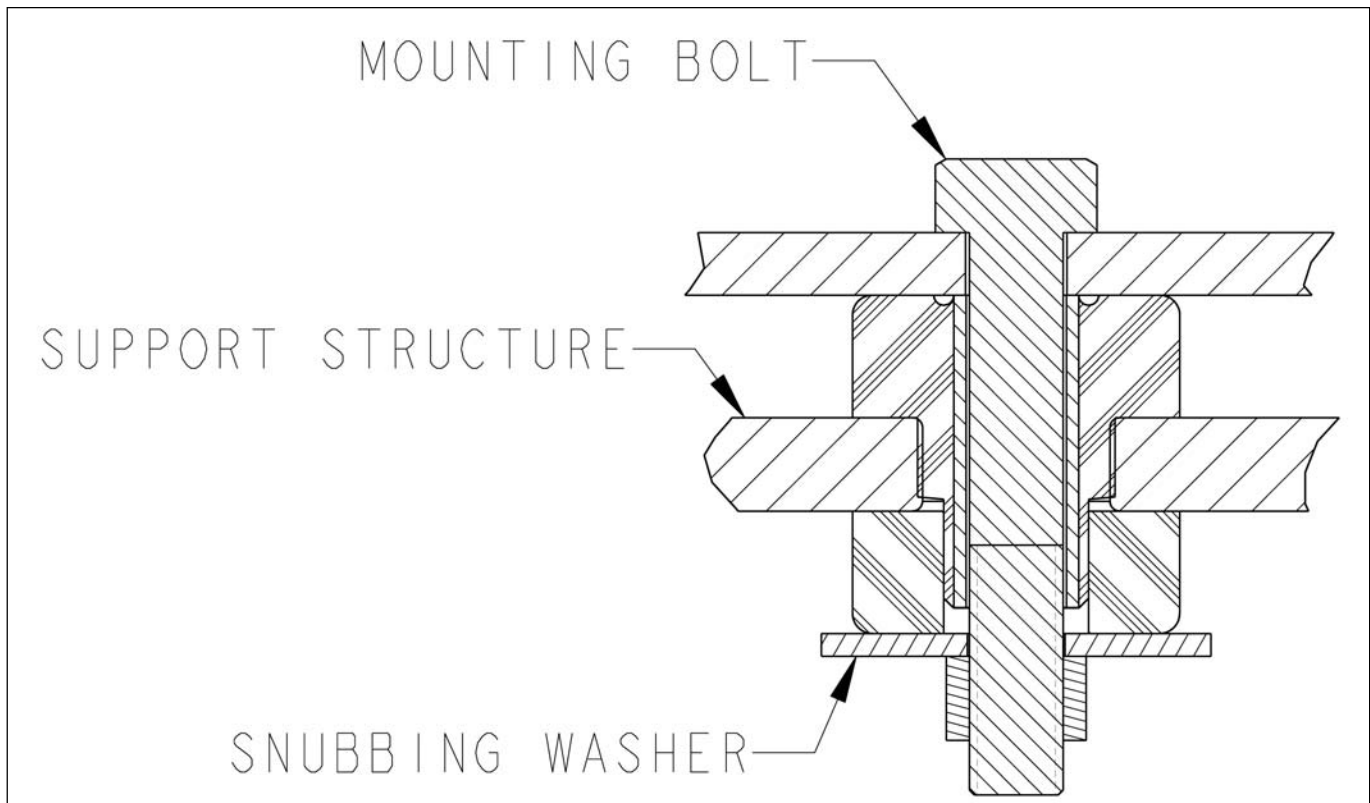

Specifications subject to change without notice. Check with factory for latest revisions. The Federal Trade Commission considers no existing test methods or standards regarding flammability as accurate indicators of the performance of cellular plastic materials under actual fire conditions. Results of existing test methods, such as UL-94, MVSS-302, SAE J-369, and FAR 25.853 are intended only as measurements of the performance of such materials under specific controlled test conditions. Any flammability ratings shown are not intended to reflect hazards presented by these materials under actual fire conditions. The information contained herein is based on laboratory test data developed for PTI and is believed to be reliable, but its accuracy or completeness is not guaranteed. The buyer must test any product to determine the suitability for his specific application before use. PTI DISCLAIMS ANY RESPONSIBILITY FOR: 1) WARRANTIES OF FITNESS AND PURPOSE, 2) VERBAL RECOMMENDATIONS, 3) CONSEQUENTIAL DAMAGES FROM USE AND 4) VIOLATION OF ANY PATENTS OR TRADEMARKS HELD BY OTHERS.